




THOK TP4-LTD

FRAME	THOK - High Module carbon fiber, headtube tapered 1.5, 29" geometry with flipchip, 27,5" compatibility, integrated down tube battery, UDH Hanger tecnology, enclosed internal cable, fully sealed cartridge bearing, 150 mm travel
SIZES	S - M - L - XL
SEAT CLAMP	THOK custom - CNC alloy 34,9 mm
FORK	ÖHLINS - RXF36 m.2 Air TTX18, 29" Boost, 160 mm travel , 44mm offset , 1.5 tapered
REAR SHOCK	ÖHLINS - TTX2 Air, Custom tuned 210x55
STEM	RENTHAL - Apex 35 mm, ext 40 mm
HEADSET	ACROSS - BlockLock 135°
HANDLEBAR	RENTHAL - Fatbar Carbon, rise 20 mm, width 800mm
GRIPS	THOK - Lock-On grips
SADDLE	FIZIK - Alpaca Terra X5 with intergrated multitool and Co2 cartridges
SEAT POST	THOK - dropper post micro height adjustable, remote control (S/125 mm - M/170 mm- L/XL 200 mm)
DISK BRAKES	MAGURA - MT7, 4 piston, MDR-P 203mm rotors
REAR DERAILEUR	SRAM - GX EAGLE T-TYPE 12S *power supplied by Bosch battery
SHIFT LEVER	SRAM - AXS POD
CASSETTE	SRAM - XS-1275 T-TYPE 10-52T
CHAIN	SRAM - GX T-TYPE 12S
CRANKSET & CHAINRING	SRAM - GX 165 mm with SRAM T-type chainring 34T.
MOTOR & BATTERY	BOSCH - Performance Line CX (250W - 85Nm) - Internal BOSCH Powertube battery 800 Wh (compatibility with PT600 and PT400) - *optional Bosch Powermore range extender 250Wh
DISPLAY & SWITCH CONTROL	BOSCH - Purion200 - 1,6" LCD color display
FRONT WHEEL	DT-SWISS - HXC1501 Carbon, 29"x 30 mm, 15x110
REAR WHEEL	DT-SWISS - HXC1501 Carbon, 29"x 30 mm, 12x148, XD freehub body
FRONT TIRE	SCHWALBE - Albert Gravity Pro 29" x 2.6, Ultra Soft TLR
REAR TIRE	SCHWALBE - Albert Gravity Pro 29" x 2.6, Soft TLR
PEDALS	CRANKBROTHERS - Stamp7 large
MAX WEIGHT LIMIT	120kg + the bike's weight
RETAIL PRICE	CHECK THOK'S WEBSITE - WWW.THOKBIKES.COM

THOK reserves the right to modify at any time the tech specs of all its bikes, including the above, without any upfront warning or notice.

KP Srl

Strada Tagliata, 18
12051 Alba [CN] - Italy
P.IVA 03651730040
www.thokbikes.com

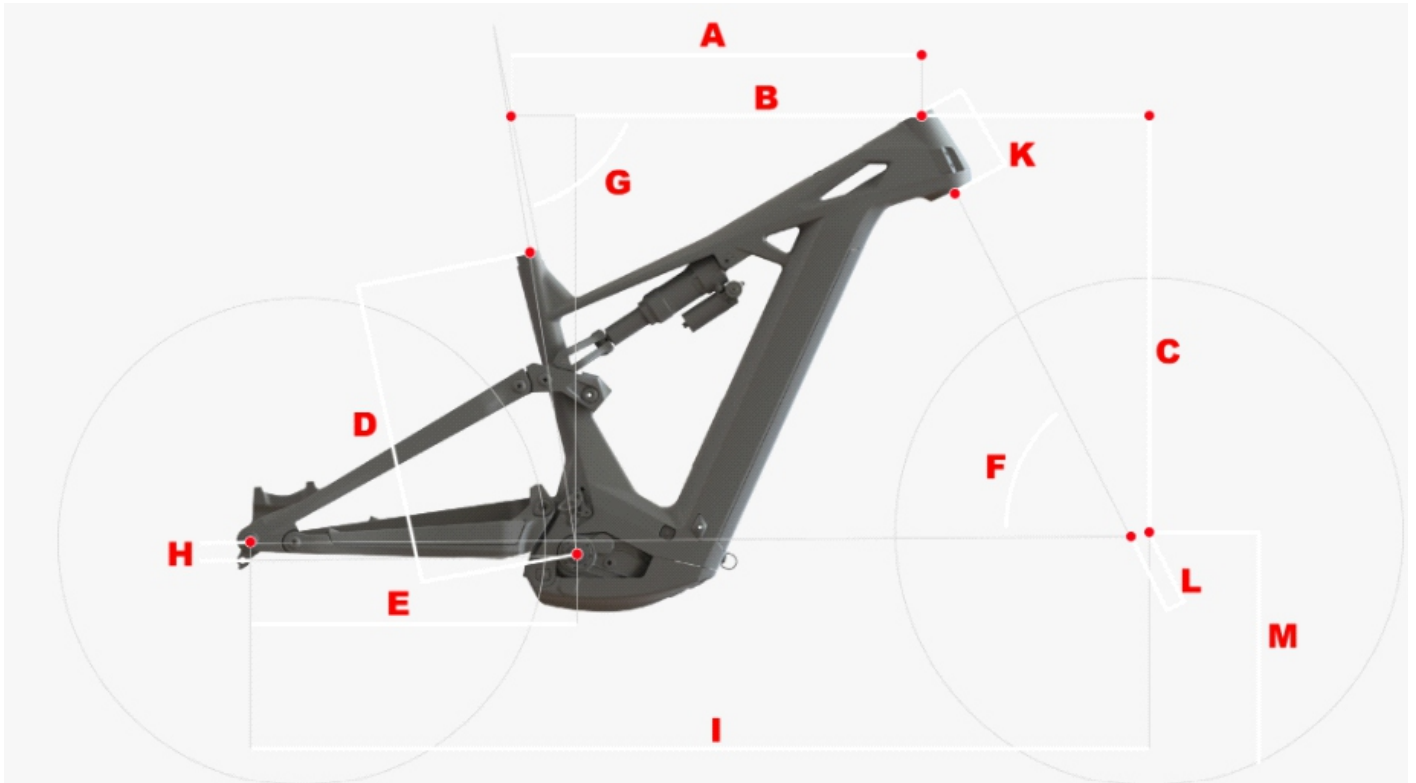

THOK CONTROL GEOMETRY- FLIP CHIP - HIGH (210x55_152 mm - Fork 564mm/152.2mm travel - 29x2.6)

REF	SIZE	S	M	L	XL
D	Seat Tube Length - Center to Top (mm)	395	410	430	465
A	Top Tube Length - Horizontal Effective (mm)	560,1	579,9	601,7	623,5
M	BB Height (mm)	359,5	359,5	359,5	359,5
H	BB Drop	19	19	19	19
E	ChainStay Length (mm)	459	459	459	459
G	Seat Tube Angle	79	79	79	79
F	Head Tube Angle	64,5	64,5	64,5	64,5
K	Head Tube Length	100	110	120	130
I	Wheel Base (mm)	1236,6	1248,4	1272,7	1297
C	Stack	598,8	609,3	618,3	627,4
B	Reach	447	457	477	497
L	Fork Offset	44	44	44	44

THOK CONTROL GEOMETRY- FLIP CHIP - LOW (210x55_152 mm - Fork 564mm/150.8mm travel - 29x2.6)

REF	SIZE	S	M	L	XL
D	Seat Tube Length - Center to Top (mm)	395	410	430	465
A	Top Tube Length - Horizontal Effective (mm)	560,1	579,9	601,7	623,5
M	BB Height (mm)	350,5	350,5	350,5	350,5
H	BB Drop	28	28	28	28
E	ChainStay Length (mm)	459	459	459	459
G	Seat Tube Angle	78,5	78,5	78,5	78,5
F	Head Tube Angle	64	64	64	64
K	Head Tube Length	100	110	120	130
I	Wheel Base (mm)	1238,9	1249,7	1274	1299,3
C	Stack	598,8	609,3	618,3	627,4
B	Reach	447	457	477	497
L	Fork Offset	44	44	44	44