

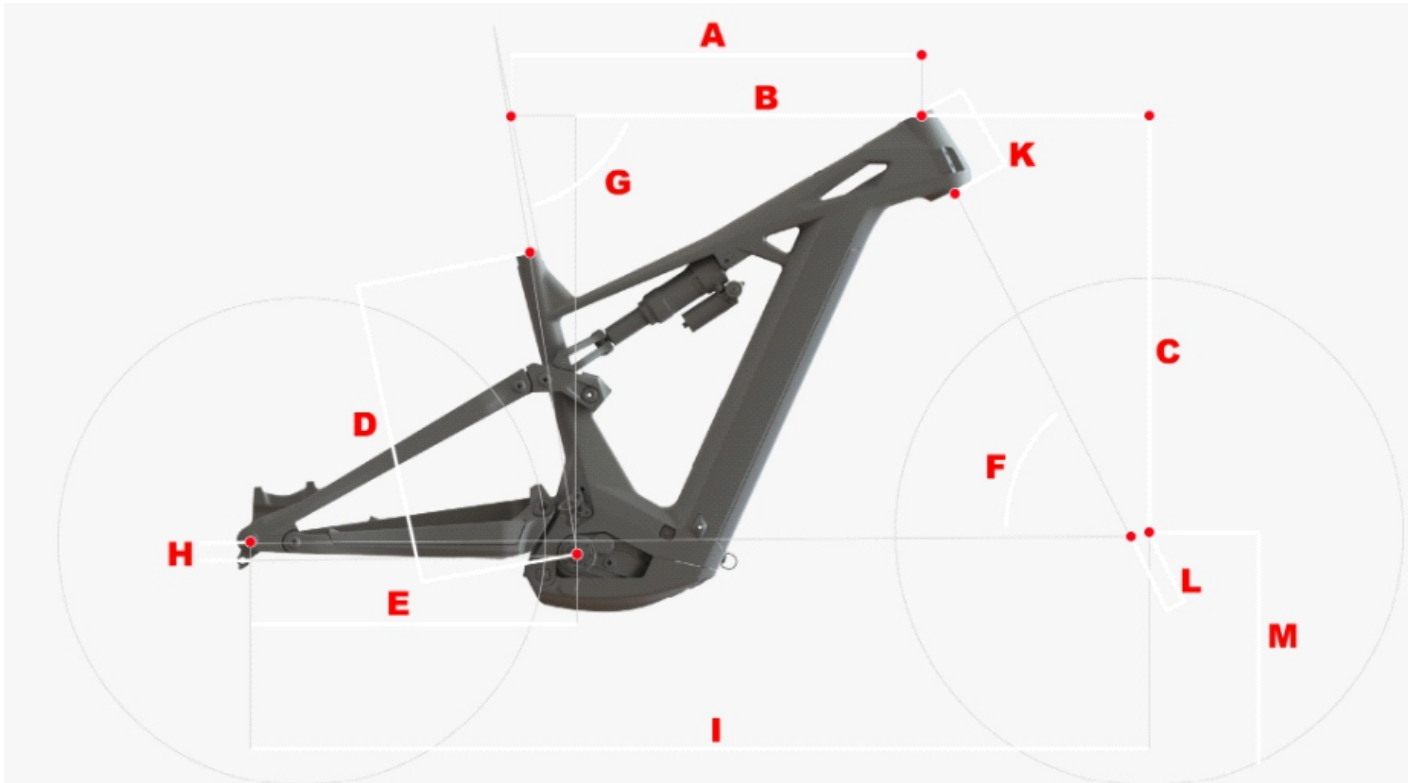

THOK TP4-R

FRAME	THOK - High Module carbon fiber, headtube tapered 1.5, 29" geometry with flipchip, 27,5" compatibility, integrated down tube battery, UDH Hanger tecnology, enclosed internal cable, fully sealed cartridge bearing, 150 mm travel
SIZES	S - M - L - XL
SEAT CLAMP	THOK custom - CNC alloy 34,9 mm
FORK	FOX - 36 Float Performance, P-S E-Optimized, 29" Boost, GRIP, 160 mm travel, 44mm
REAR SHOCK	FOX - Float X, 2 Pos Adj, THOK Custom tuned, 210x55
STEM	THOK - Alloy with front clamp oversize 35 mm, ext 50 mm
HEADSET	ACROSS - BlockLock 135°
HANDLEBAR	THOK - Alloy 6061 oversize 35 mm DB, rise 20 mm, width 780mm
GRIPS	THOK - Lock-On grips
SADDLE	THOK - Fit in hollow Cr.Mo rail
SEAT POST	THOK - Dropper post micro height adjustable, remote control (S/125 mm - M/170 mm- L/XL 200 mm)
DISK BRAKES	MAGURA - MT5, 4 piston, MDR-C 203mm rotors
REAR DERAILLEUR	SHIMANO - XT 12S
SHIFT LEVER	SHIMANO - 12S
CASSETTE	SHIMANO - 12S 10-51T
CHAIN	SHIMANO - 12S
CRANKSET & CHAINRING	FSA 165 mm with chainring 34T
MOTOR & BATTERY	BOSCH - Performance Line CX (250W - 85Nm) - Internal BOSCH Powertube battery 800 Wh (compatibility with PT600 and PT400) - *optional Bosch Powermore range extender 250Wh
DISPLAY & SWITCH CONTROL	BOSCH - Purion200 - 1,6" LCD color display
FRONT WHEEL	DT-SWISS - H1900 Alloy, 29"x 30 mm, 15x110
REAR WHEEL	DT-SWISS - H1900 Alloy, 29"x 30 mm, 12x148, MS freehub body
FRONT TIRE	SCHWALBE - Albert Gravity Pro 29" x 2.6 Ultra Soft TLR
REAR TIRE	SCHWALBE - Albert Gravity Pro 29" x 2.6 Soft TLR
PEDALS	Flat polyethylene pedals
MAX WEIGHT LIMIT	120kg + the bike's weight
RETAIL PRICE	CHECK THOK'S WEBSITE - WWW.THOKBIKES.COM

THOK reserves the right to modify at any time the tech specs of all its bikes, including the above, without any upfront warning or notice.

KP Srl

Strada Tagliata, 18
 12051 Alba [CN] - Italy
 P.IVA 03651730040
www.thokbikes.com



THOK CONTROL GEOMETRY- FLIP CHIP - HIGH (210x55_152 mm - Fork 564mm/152.2mm travel - 29x2.6)

REF	SIZE	S	M	L	XL
D	Seat Tube Length - Center to Top (mm)	395	410	430	465
A	Top Tube Length - Horizontal Effective (mm)	560,1	579,9	601,7	623,5
M	BB Height (mm)	359,5	359,5	359,5	359,5
H	BB Drop	19	19	19	19
E	ChainStay Length (mm)	459	459	459	459
G	Seat Tube Angle	79	79	79	79
F	Head Tube Angle	64,5	64,5	64,5	64,5
K	Head Tube Length	100	110	120	130
I	Wheel Base (mm)	1236,6	1248,4	1272,7	1297
C	Stack	598,8	609,3	618,3	627,4
B	Reach	447	457	477	497
L	Fork Offset	44	44	44	44

THOK CONTROL GEOMETRY- FLIP CHIP - LOW (210x55_152 mm - Fork 564mm/150.8mm travel - 29x2.6)

REF	SIZE	S	M	L	XL
D	Seat Tube Length - Center to Top (mm)	395	410	430	465
A	Top Tube Length - Horizontal Effective (mm)	560,1	579,9	601,7	623,5
M	BB Height (mm)	350,5	350,5	350,5	350,5
H	BB Drop	28	28	28	28
E	ChainStay Length (mm)	459	459	459	459
G	Seat Tube Angle	78,5	78,5	78,5	78,5
F	Head Tube Angle	64	64	64	64
K	Head Tube Length	100	110	120	130
I	Wheel Base (mm)	1238,9	1249,7	1274	1299,3
C	Stack	598,8	609,3	618,3	627,4
B	Reach	447	457	477	497
L	Fork Offset	44	44	44	44